



A0360 HOSE SWIVEL

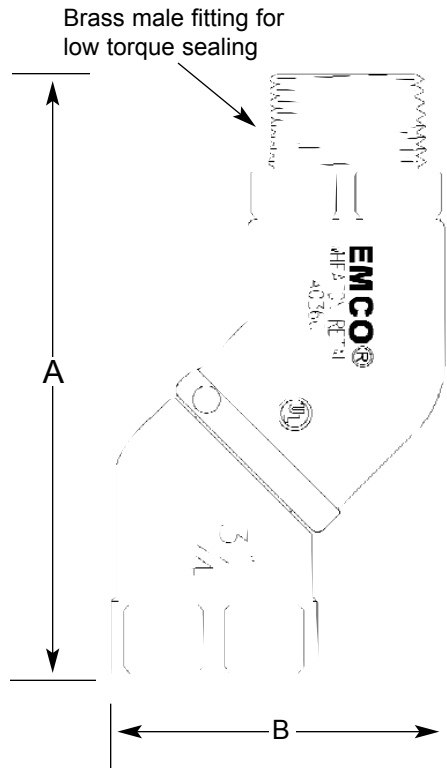

Nylon bushings permit the hose and nozzle to move smoothly and freely on any plane or axis

Fluorosilicone o-rings for super low temperature sealing

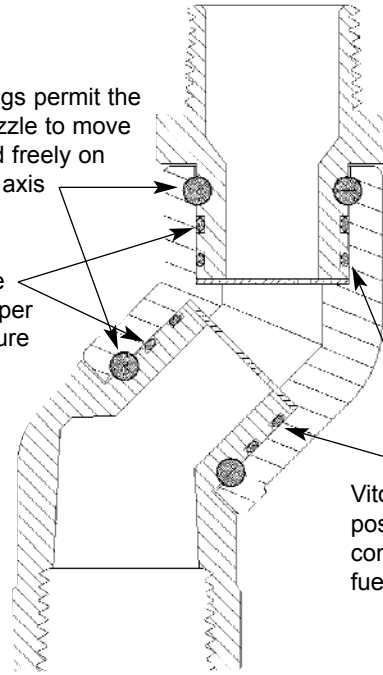

Viton® o-rings provide positive sealing and compatibility with all fuels

Viton® is a registered trademark of DuPont Dow Elastomers.



Complies with UL 567 Standard

Guide Specification: Underwriters Laboratory approved hose swivel designed for use on non-vapor recovery applications. Outlet swivel rotates 360° at the nozzle inlet to keep the nozzle in a comfortable, upright position, and prevents hose kinking and wear. Polished die-cast aluminum body with brass male fittings. Available with 3/4" or 1" NPT, BSPT or BSPP threads.

<u>Model No.</u>	<u>Hose Connection</u>	<u>Nozzle Connection</u>	<u>A</u>	<u>B</u>	<u>Weight</u>
A0360-075	3/4" Female	3/4" Male	4.0	2.2	7.2 oz.
A0360-076	3/4" Female BSPT	3/4" Male BSPT	4.0	2.2	7.2 oz.
A0360-077	3/4" Female BSPP	3/4" Male BSPP	4.0	2.2	7.2 oz.
A0360-100	1" Female	1" Male	4.4	2.6	11.5 oz.
A0360-101	1" Female BSPT	1" Male BSPT	4.4	2.6	11.5 oz.
A0360-102	1" Female BSPP	1" Male BSPP	4.4	2.6	11.5 oz.

Emco Wheaton Retail Corporation
2300 Industrial Park Drive • Wilson, North Carolina 27893
252-243-0150 • 252-243-4603 (fax)
www.emcoretail.com

Form D-1000
Date 01/01