


# A0721 Monitoring Well Manholes

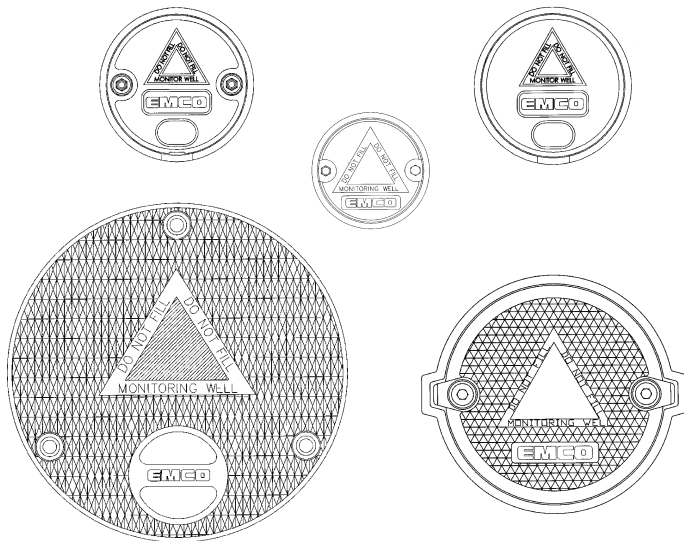


- Painted ductile iron lid and rim
- Optional steel or polyethylene skirt
- Heavy-duty, 100% welded skirts available
- Bolt-down units have water-tight lids
- Stainless steel bolts
- Meets AASHTO H20 wheel loading

Size	Model No.	Style	Skirt Type	Overall Height	Clearhole ID	Maxium Dia.	Weight
5"	A0721-105	Bolt-down	Steel	7.5"	3.9"	6.0"	5.7 lbs.
	A0721-106	Bolt-down	Steel	7.5"	4.8"	6.6"	6.2 lbs.
6"	A0721-106A	Bolt-down	Steel	10.0"	4.8"	6.6"	6.7 lbs.
	A0721-188L	Lay-in	Steel	8.0"	7.8"	9.8"	11.9 lbs.
8"	A0721-008	Bolt-down	Poly	12.0"	6.0"	10.4"	10.7 lbs.
	A0721-108	Bolt-down	Steel	12.0"	6.0"	10.4"	13.2 lbs.
	A0721-188	Bolt-down	Steel	8.0"	6.0"	10.4"	12.1 lbs.
	A0721-208	Bolt-down	HDSteel	12.0"	6.0"	10.4"	12.7 lbs.
	A0721-001	Bolt-down	Poly	12.0"	9.4"	15.1"	23.0 lbs.
12"	A0721-001L	Lay-in	Poly	12.0"	11.2"	13.6"	22.8 lbs.
	A0721-101	Bolt-down	Steel	12.0"	9.4"	15.1"	27.0 lbs.
	A0721-101L	Lay-in	Steel	12.0"	11.2"	13.6"	26.8 lbs.
	A0721-119	Bolt-down	Steel	19.5"	9.4"	15.1"	31.6 lbs.
	A0721-128	Bolt-down	Poly	8.0"	9.4"	15.1"	21.5 lbs.
	A0721-128L	Lay-in	Poly	8.0"	11.2"	13.6"	21.3 lbs.
	A0721-128A	Bolt-down	Steel	8.0"	9.4"	15.1"	25.5 lbs.
	A0722-001*	Bolt-down	Poly	12.0"	9.4"	15.1"	23.8 lbs.
18"	A0721-018	Bolt-down	Steel	12.0"	13.8"	19.4"	48.0 lbs.
	A0721-118	Bolt-down	Steel	18.0"	13.8"	19.4"	59.0 lbs.

\*Includes locking cap & collar


**Optional Items:**

- A0720-001 - Locking Cap and Collar
- ID Tags - Add ID to the 8-digit part number
- Heavy Duty, Welded Skirts - Replace the first digit of the variant number with a 2

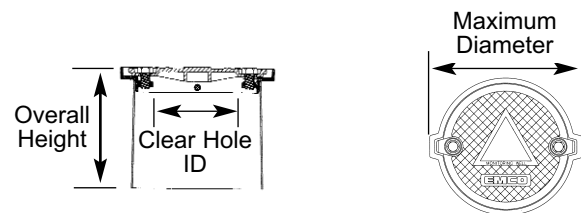


# A0721 Monitoring Well Manholes


Stainless steel bolts - no more rusted bolts

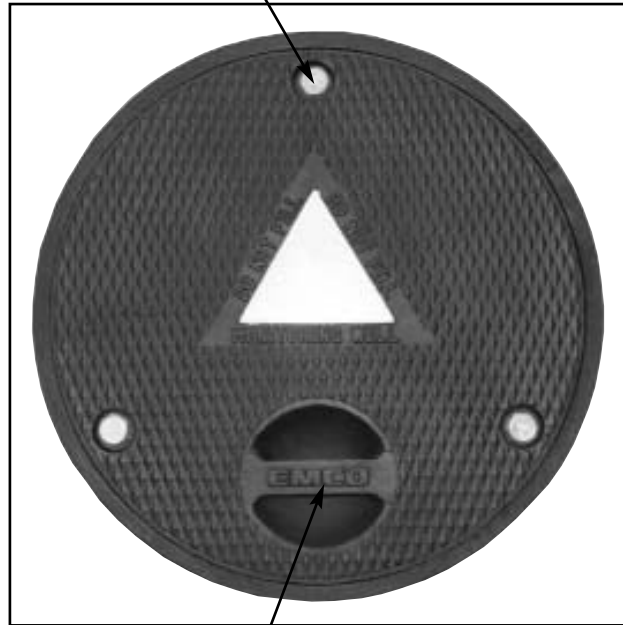

Built-in side handle on 18" models -  
one hand opening and positioning

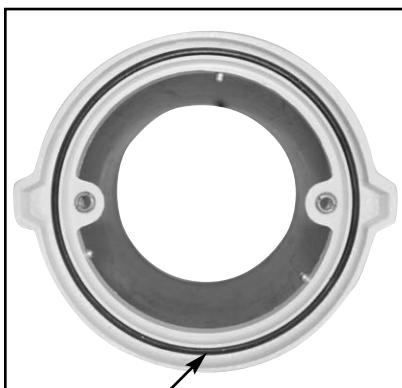

Water-tight gasket on bolt-down  
versions

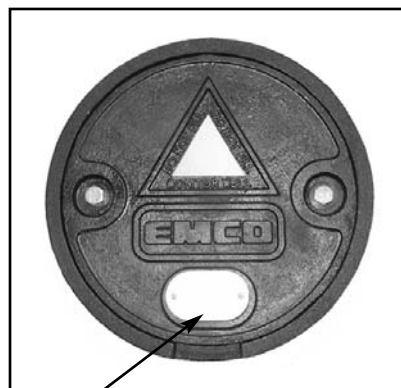

ID tag available on all models;  
large enough for all new  
regulatory requirements



Large notch on 8" lay-in eliminates  
broken screwdrivers

Custom skirt height and gauge are available upon request.