


# A2500 STANDARD NOZZLE

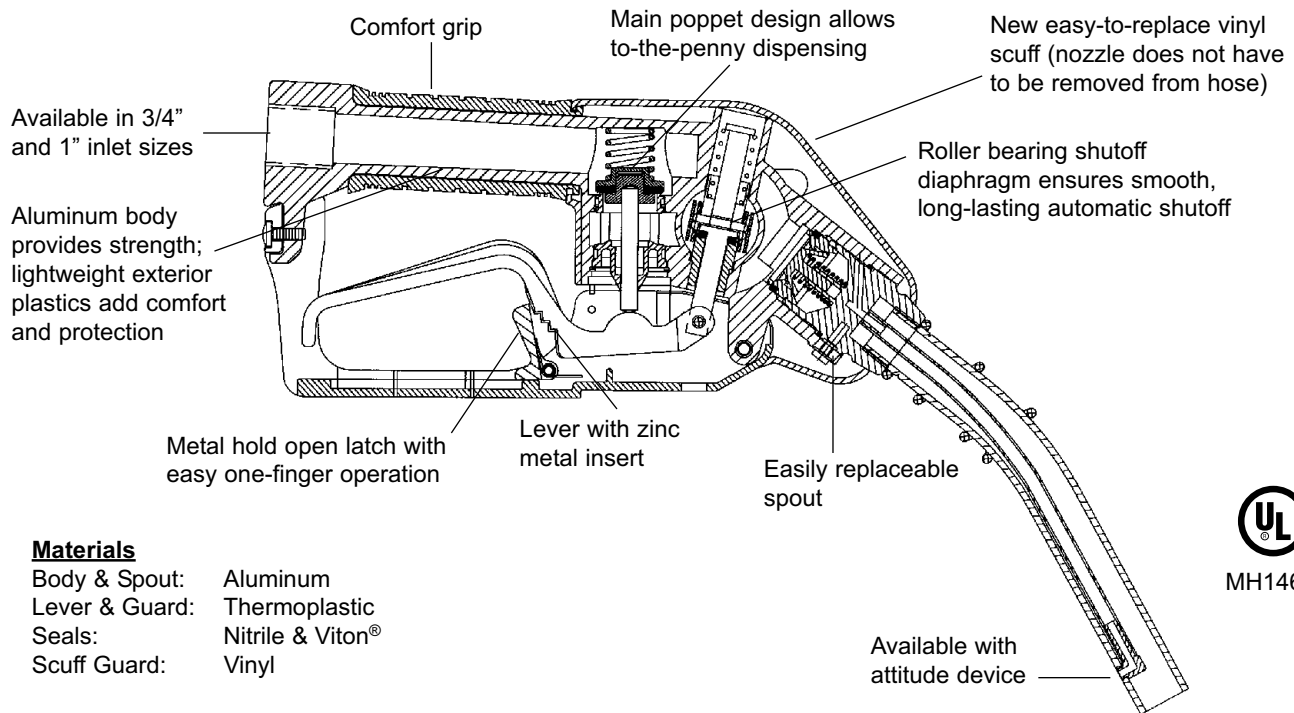

## Materials

Body & Spout: Aluminum  
 Lever & Guard: Thermoplastic  
 Seals: Nitrile & Viton®  
 Scuff Guard: Vinyl

Available with attitude device

**Guide Specification:** Underwriters Laboratories approved fuel dispensing nozzle designed for use on industrial and retail fuel dispensing equipment. Mechanical feature detects a full tank condition and shuts off additional flow automatically. Hold open latch assembly facilitates hands-free operation. Cast aluminum body with Nitrile and Viton® seals. Inlet available in 3/4 inch and 1 inch sizes; NPT and BSP. Dispensing spouts available in 13/16 (unleaded) and 15/16 (leaded) configurations. Weighs 2.4 lbs.


Viton® is a registered trademark of DuPont Dow Elastomers.

<b>Standard Model No.</b>	<b>Color</b>
A2500-002	Black
A2500-005	Blue Chevron
A2500-058	Blue Amoco
A2500-059	White
A2500-060	Red Mobil
A2500-061	Blue Mobil
A2500-062	Green BP Mobil
A2500-063	Red Chevron Shell
A2500-064	Yellow Shell

<b>Scuff Kit</b>	<b>Splash Guard</b>	<b>Color</b>
A0550-102K	A0500-002	Black
A0550-105K	A0500-005	Blue Chevron
A0550-158K	A0500-058	Blue Amoco
A0550-159K	A0500-059	White
A0550-160K	A0500-060	Red Mobil
A0550-161K	A0500-061	Blue Mobil
A0550-162K	A0500-062	Green BP Mobil
A0550-163K	A0500-063	Red Chevron Shell
A0550-164K	A0500-064	Yellow Shell

## A2500 Flow Data

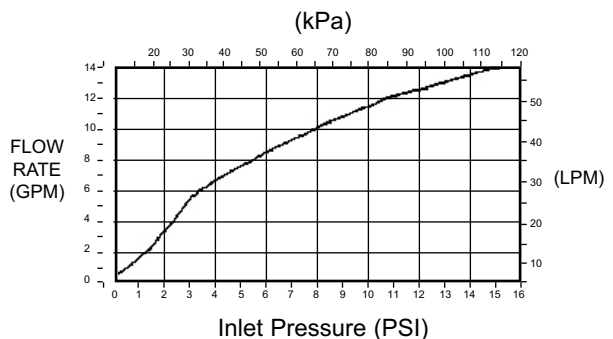

## Emco Wheaton Retail Corporation

2300 Industrial Park Drive • Wilson, North Carolina 27893  
 Phone: 252-243-0150 • Fax: 252-243-4603 • www.emcoretail.com

Form N-1002  
 Date 08/07