



A4005

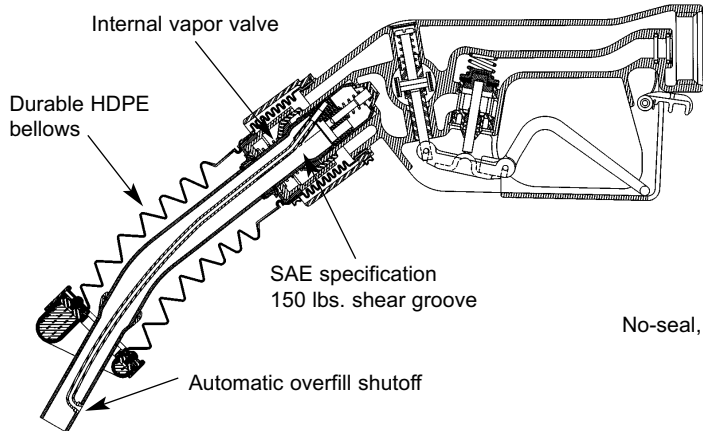


A4015

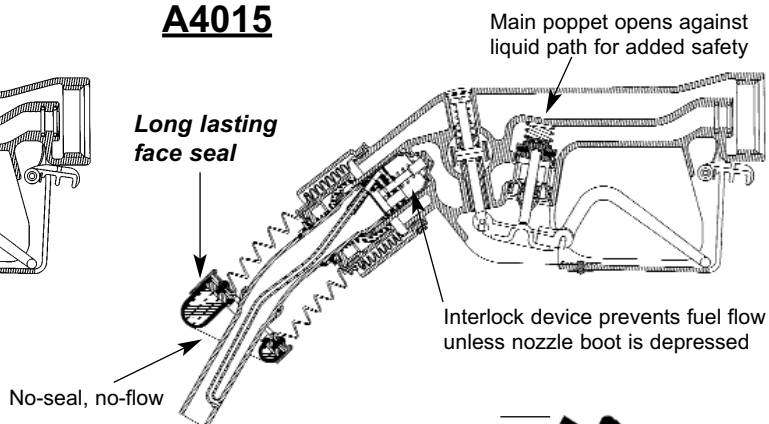

CARB Certified - Order #95-26
UL Listed

All features apply to the design of both nozzles.
The A4015 features the same overall dimensions
as a conventional nozzle.



Guide Specification: Balance system vapor recovery nozzle constructed with sand cast aluminum body, extruded aluminum spout (SAE specifications 150 lbs. shear groove). Internal vapor valve, no-seal no-flow interlock and automatic shutoff. Internal pressure shutoff to detect vapor blockage. Viton® o-rings on main seals. Bellows constructed of HDPE to resist twisting, cutting and tearing.

Viton® is a registered trademark of DuPont Dow Elastomers.

<u>Item Number</u>	<u>Type</u>	<u>Spout</u>	<u>A</u>	<u>B</u>	<u>Weight</u>
A4005-002	New	Unleaded	15.5"	9.5"	4.13 lbs.
A4005-004	Rebuilt	Unleaded	15.5"	9.5"	4.13 lbs.
A4015-002	New	Unleaded	13.2"	8.2"	3.94 lbs.
A4015-004	Rebuilt	Unleaded	13.2"	8.2"	3.94 lbs.

Nozzles listed above include a black scuff guard. For additional scuff guard colors, contact our Customer Service Dept.

A4005 Replacement Kits

- 493040 Spout Kit Unleaded
- 493042 Boot Face Kit
- 493047 Clamp & Cover Kit
- 493062 Latch Kit
- 493780 Boot Only Kit
- 493781 Boot & Face Kit
- 493846 Front End Kit Spout/Boot
- 563834 Clamp Small
- 566965 Clamp Large

A4015 Replacement Kits

- 493042 Boot Face Kit
- 493047 Clamp & Cover Kit
- 493062 Latch Kit
- 493398 Spout Kit Unleaded
- 493400 Boot & Face Kit
- 493584 Boot Only Kit
- 493847 Front End Kit Spout/Boot
- 563834 Clamp Small
- 566965 Clamp Large

Materials

- Body & Spout: Aluminum
- Lever: Thermoplastic
- Lever Guard: Aluminum
- Seals: Nitrile & Viton®
- Scuff Guard: Vinyl

Emco Wheaton Retail Corporation
2300 Industrial Park Drive • Wilson, North Carolina 27893
252-243-0150 • 252-243-4603 (fax)
www.emcoretail.com

Form N-1004
Date 07/06