


A6000

Roughneck®

Heavy Duty, High Flow
Truck, Bus, Fleet Nozzle

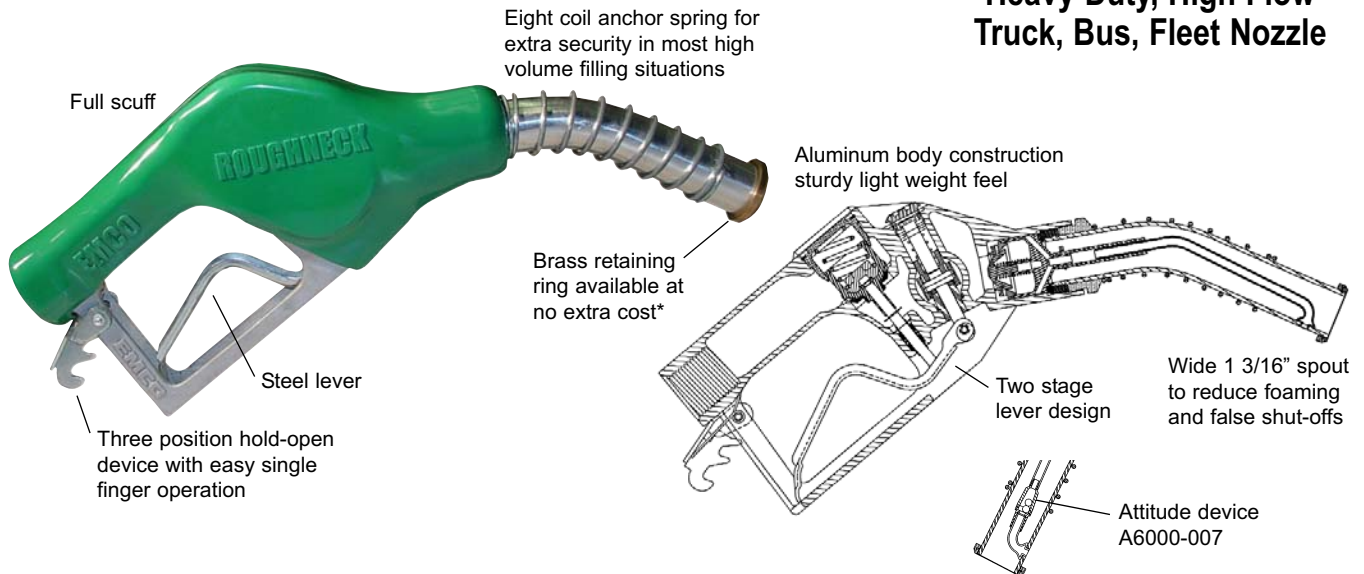

Guide Specification: Heavy-duty fuel dispensing nozzle for use at bus and truck fleet fueling installations and commercial truck stops. The nozzle features an automatic shut off device to prevent overfilling. The inlet port is 1" in diameter utilizing NPT, BSPP or BSPT threads. The nozzle accommodates a fuel delivery rate of 60 gpm (225 liters/minute). A steel lever and hold open latch are used to ensure long service life under extreme conditions. The nozzle incorporates a hydraulic shock absorbing device on the main fuel flow valve. This prevents excessive nozzle kickback when the automatic shut-off mechanism activates under full flow conditions.

Model Number	Description	Attitude Device	Inlet	Weight	Scuff
A6000-001	High Flow Automatic Nozzle	No	1"	3.4 lbs.	Black
A6000-002	High Flow Automatic Nozzle	No	1" BSPT	3.4 lbs.	Black
A6000-007	High Flow Automatic Nozzle	Yes	1" BSPT	3.4 lbs.	Black
A6000-010	High Flow Automatic Nozzle	No	1"	3.4 lbs.	Yellow
A6000-012	High Flow Automatic Nozzle	No	1"	3.4 lbs.	Green

*Add "B" to the variant number for brass spout retaining ring

Replacement Parts

- 492769 Spout Kit
- 492958 Latch Kit
- 562587 Scuff - Black
- 565912 Scuff - Yellow
- 566176 Scuff - Green

Materials

- Body & Spout: Aluminum
- Lever: Steel
- Lever Guard: Aluminum
- Seals: Nitrile
- Scuff Guard: Vinyl

