
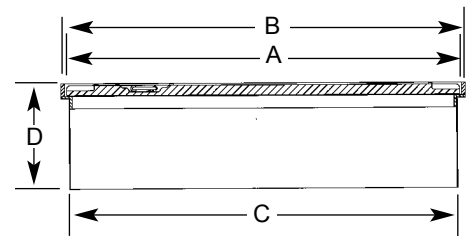


# Composite Manholes

## A0716 Composite Manholes

The Emco Wheaton A0716 Composite Manhole is a new design in lightweight, slip-resistant composite manhole covers. Using the latest manufacturing technology to ensure porosity-free molding, and compact, homogeneous distribution of reinforcing fiber, these covers easily exceed H20 wheel loading requirements. The covers also utilize a UV resistant treatment to protect against sun and weather damage.

- Exceeds AASHTO H20 wheel loading
- Replaces EBW 78I series and OPW 39CD and 44CD models
- Reduces lid weight by 50% compared to traditional steel lids
- Durable composite construction of fiberglass and polyester resin
- Slip-resistant tread pattern tested in marine applications
- Available in lay-in and bolt-down, water-resistant styles
- Steel rim and skirt assemblies are fully painted inside and out
- Handles available in spring-loaded and European styles
- Easy lid removal and replacement

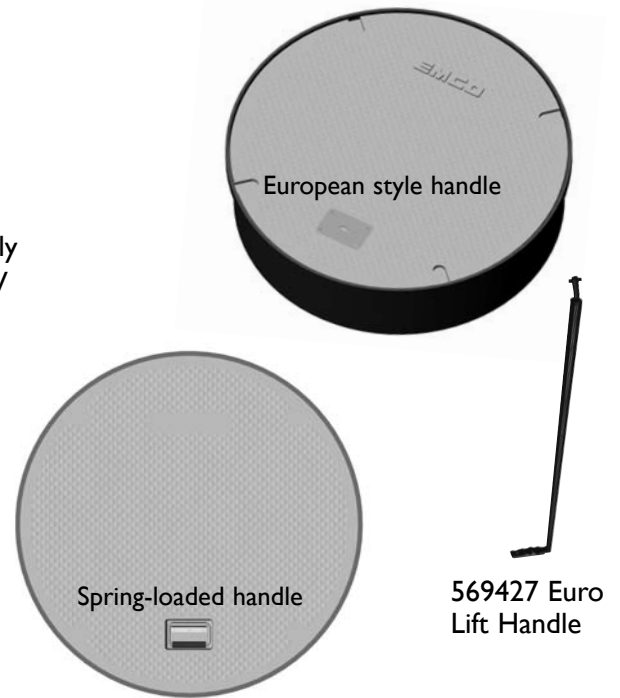

|            | Part Number | Style           | Lid Dia. A | Overall Dia. B | Clear Hole ID C | Overall Height D | Weight Lbs. | Lid Only    | Weight Lbs. |
|------------|-------------|-----------------|------------|----------------|-----------------|------------------|-------------|-------------|-------------|
| <b>39"</b> | A0716-039   | Lay-in          | 39.50"     | 41.25"         | 38.25"          | 10.5"            | 122         | A0716-039L  | 70          |
|            | A0716-039B  | Bolt-Down       | 39.50"     | 41.25"         | 35.75"          | 10.5"            | 123         |             | 70          |
|            | A0716-039E  | Lay-in, Euro    | 39.50"     | 41.25"         | 38.25"          | 10.5"            | 122         | A0716-039EL | 70          |
|            | A0716-039BE | Bolt-Down, Euro | 39.50"     | 41.25"         | 35.75"          | 10.5"            | 123         |             | 70          |
| <b>42"</b> | A0716-042   | Lay-in          | 43.75"     | 44.75"         | 42.62"          | 10.5"            | 142         | A0716-042L  | 75          |
|            | A0716-042B  | Bolt-Down       | 43.75"     | 44.75"         | 40.30"          | 10.5"            | 143         |             | 75          |
|            | A0716-042E  | Lay-in, Euro    | 43.75"     | 44.75"         | 42.62"          | 10.5"            | 142         | A0716-042EL | 75          |
|            | A0716-042BE | Bolt-Down, Euro | 43.75"     | 44.75"         | 40.30"          | 10.5"            | 143         |             | 75          |
| <b>44"</b> | A0716-044   | Lay-in          | 44.25"     | 45.25"         | 43.00"          | 10.5"            | 149         | A0716-044L  | 91          |
|            | A0716-044B  | Bolt-Down       | 44.25"     | 45.25"         | 40.50"          | 10.5"            | 150         |             | 91          |
|            | A0716-044E  | Lay-in, Euro    | 44.25"     | 45.25"         | 43.00"          | 10.5"            | 149         | A0716-044EL | 91          |
|            | A0716-044BE | Bolt-Down, Euro | 44.25"     | 45.25"         | 40.50"          | 10.5"            | 150         |             | 91          |

Custom skirt heights available